



**telescopic
sliding doors**

LUCE T

The Luce T telescopic sliding door operators are perfect for automating locations where there is limited space to the side of the passage. Available in two-leaves (100+100 kg) or four-leaves (70+70+70+70 kg) versions.




LUCE T



download LUCE T
instructions
and certificates

www.myoneautomation.com

Operator for sliding doors with three-wheeled carriages, which ensures that the doors are very stable and easy to adjust, both in height and depth. The operator has a control unit with LED alphanumeric display, full-range switching power supply (100-240 V 50/60 Hz) and battery charger. The presence of a USB connector makes it quick and easy to update the firmware as well as to copy parameters and operating logics to a new system instantly. Continuous operation guaranteed.

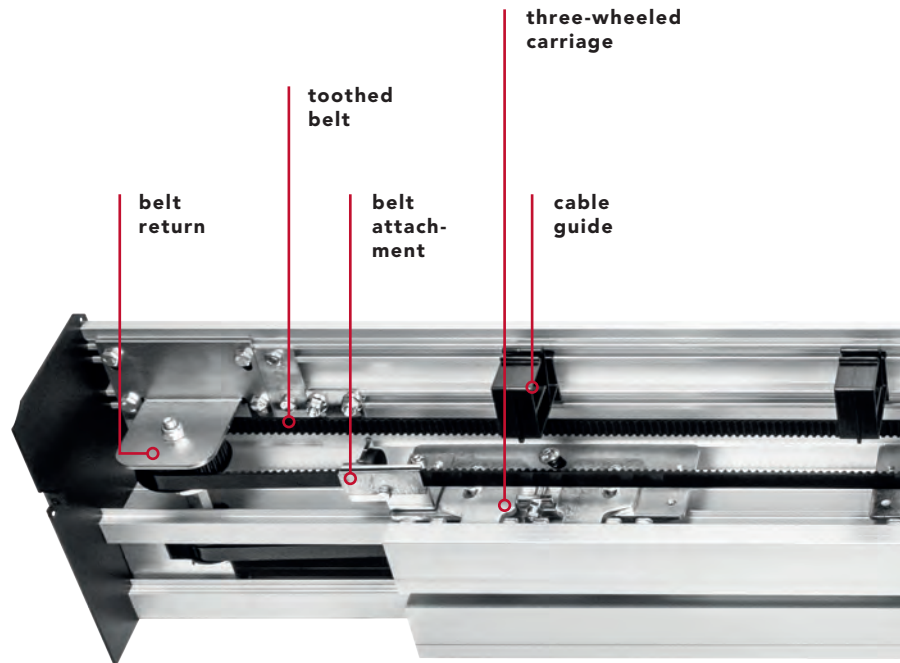

2 leaves
max. weight
100 + 100 kg




4 leaves
max. weight
70 + 70 + 70 + 70 kg

technical data


power supply	full range 100÷240 Vac 50/60 Hz
power consumption	70 W
power consumption in stand-by	3 W
accessories power supply	24 Vdc = / 1 A max
maximum speed 2 doors	0.8 m/s
maximum speed 4 doors	1.6 m/s
maximum load 2 doors	100 + 100 kg
maximum load 4 doors	70 + 70 + 70 + 70 kg
type and frequency of use	continuous operation = 100%
operating temperature	-15°C / +50°C
protection degree	IP20
data backup memory	USB flash drive

preassembled telescopic doors

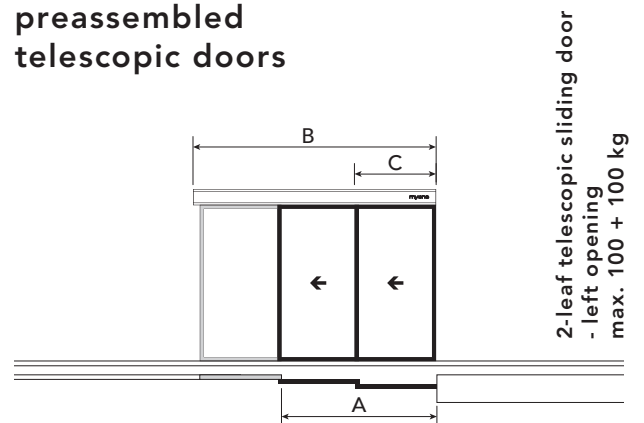


	A	B	C	
LUCET1902L	1180 mm	1900 mm	2x	666 mm
LUCET2102L	1320 mm	2100 mm	2x	730 mm
LUCET2502L	1590 mm	2500 mm	2x	860 mm
LUCET2902L	1850 mm	2900 mm	2x	995 mm
LUCET3302L	2120 mm	3300 mm	2x	1130 mm
LUCET3702L	2385 mm	3700 mm	2x	1260 mm
LUCET4202L	2710 mm	4200 mm	2x	1430 mm
LUCET5002L	3250 mm	5000 mm	2x	1695 mm
LUCET6502L	4250 mm	6500 mm	2x	2195 mm

*The values of the passage size (A) and of the leaf (C) are indicative and include an overlap of around 50 mm.

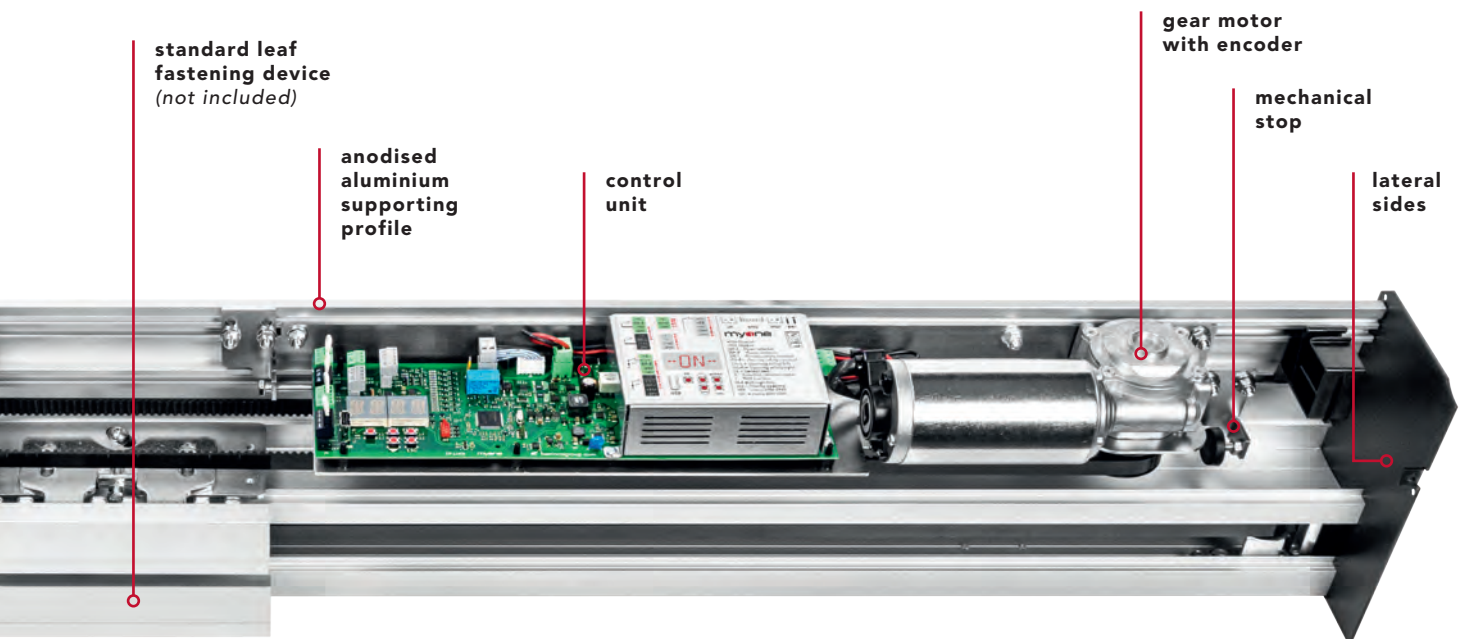


2-leaf telescopic sliding door
- right opening
max. 100 + 100 kg

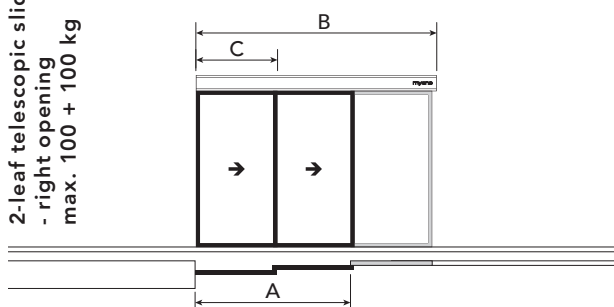

	A	B	C
LUCET1902R	1180 mm	1900 mm	2x 666 mm
LUCET2102R	1320 mm	2100 mm	2x 730 mm
LUCET2502R	1590 mm	2500 mm	2x 860 mm
LUCET2902R	1850 mm	2900 mm	2x 995 mm
LUCET3302R	2120 mm	3300 mm	2x 1130 mm
LUCET3702R	2385 mm	3700 mm	2x 1260 mm
LUCET4202R	2710 mm	4200 mm	2x 1430 mm
LUCET5002R	3250 mm	5000 mm	2x 1695 mm
LUCET6502R	4250 mm	6500 mm	2x 2195 mm

4-leaf telescopic sliding door
max. 70 + 70 + 70 + 70 kg

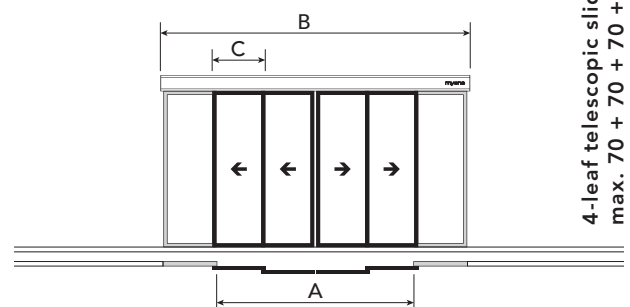

	A	B	C
LUCET2904	1860 mm	2900 mm	4x 510 mm
LUCET3304	2120 mm	3300 mm	4x 580 mm
LUCET3704	2390 mm	3700 mm	4x 648 mm
LUCET4204	2725 mm	4200 mm	4x 730 mm
LUCET5004	3260 mm	5000 mm	4x 865 mm
LUCET6504	4260 mm	6500 mm	4x 1110 mm

the preassembled operator is made up of:

control unit | gear motor with encoder | three-wheeled sliding carriages | anodised aluminium supporting profile and cover | belt return | mechanical stop | belt | cable guide | screw kit | lateral sides



framed door accessories - commercial frame



01AL0030 - 1000 mm
01AL0031 - 1500 mm
01AL0032 - 2000 mm
01AL0035 - 3000 mm

Aluminium floor
guide for one leaf.



01FE0018

Floor guide
slider.



01FE0018T

Floor guide
slider for fast
movable door.
- right/left



01AL0008 - 1000 mm
01AL0009 - 1500 mm
01AL0010 - 2000 mm

Standard leaf fastening device complete
with fixing brackets for the carriage.


01AL0015 - 3000 mm
01AL0016 - 5670 mm
01AL0020 - 6500 mm



90RM0053

Pair of leaf fixing
brackets (1 leaf).

glass door accessories - fastening set for glass leaves with pre-drilled holes



99AC0004 - 1000 mm
99AC0005 - 1500 mm
99AC0006 - 2000 mm

Fastening set for glass leaf
(10-12 mm) with pre-drilled holes.

99AC0016 - 3000 mm
99AC0021 - 5670 mm
99AC0029 - 6500 mm



01FE0050

Glass door
stainless
steel slider.



01FE0050T

Floor guide
slider for fast
movable door.
- right/left



01GM0001

Adhesive gasket
for glass leaf.
- 6 m pack

glass door accessories - fastening clamp set for glass leaves



99AC0001 - 1000 mm
99AC0002 - 1500 mm
99AC0003 - 2000 mm
99AC0014 - 3000 mm
99AC0015 - 5670 mm
99AC0027 - 6500 mm

Fastening clamp set for glass
leaf (10-12 mm thickness).



99AC0007 - 1000 mm
99AC0008 - 1500 mm
99AC0009 - 2000 mm
99AC0028 - 3000 mm

Bottom fastening clamp
set with brushes for glass
leaf (10-12 mm thickness).



01FE0018

Floor guide
slider.



01FE0018TG

Floor guide
slider for fast
movable door.
- right/left



01GM0001

Adhesive gasket
for glass leaf.
- 6 m pack



accessories



99BA0003

Emergency battery kit with wiring and bracket.



99EB0001

Electromechanical lock kit with release cord.



99EB0003

Emergency electromechanical lock kit with release cord.



99AE0002


Opening device with elastic to be used with 99EB0003 electromechanical lock.



01FE0059


Safe for external release.

operator cross-section technical drawing

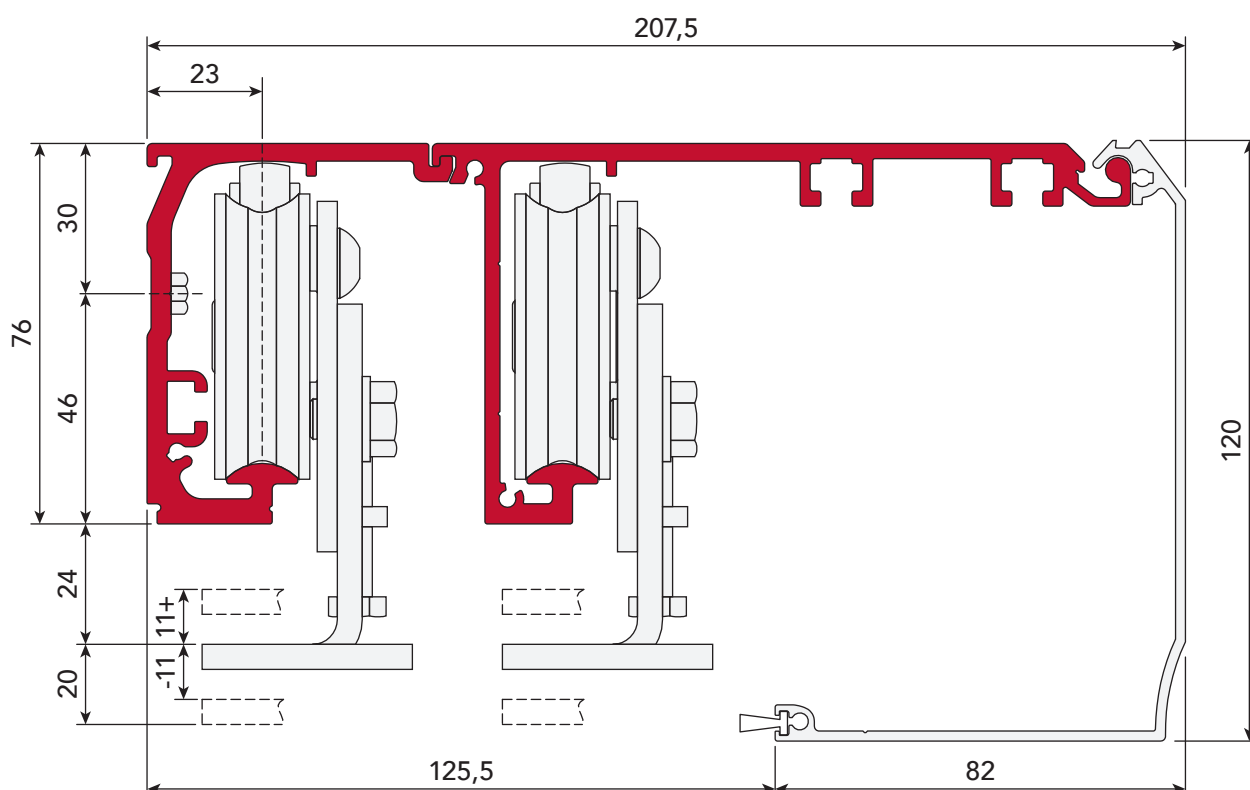




entrance with M30 myone frame

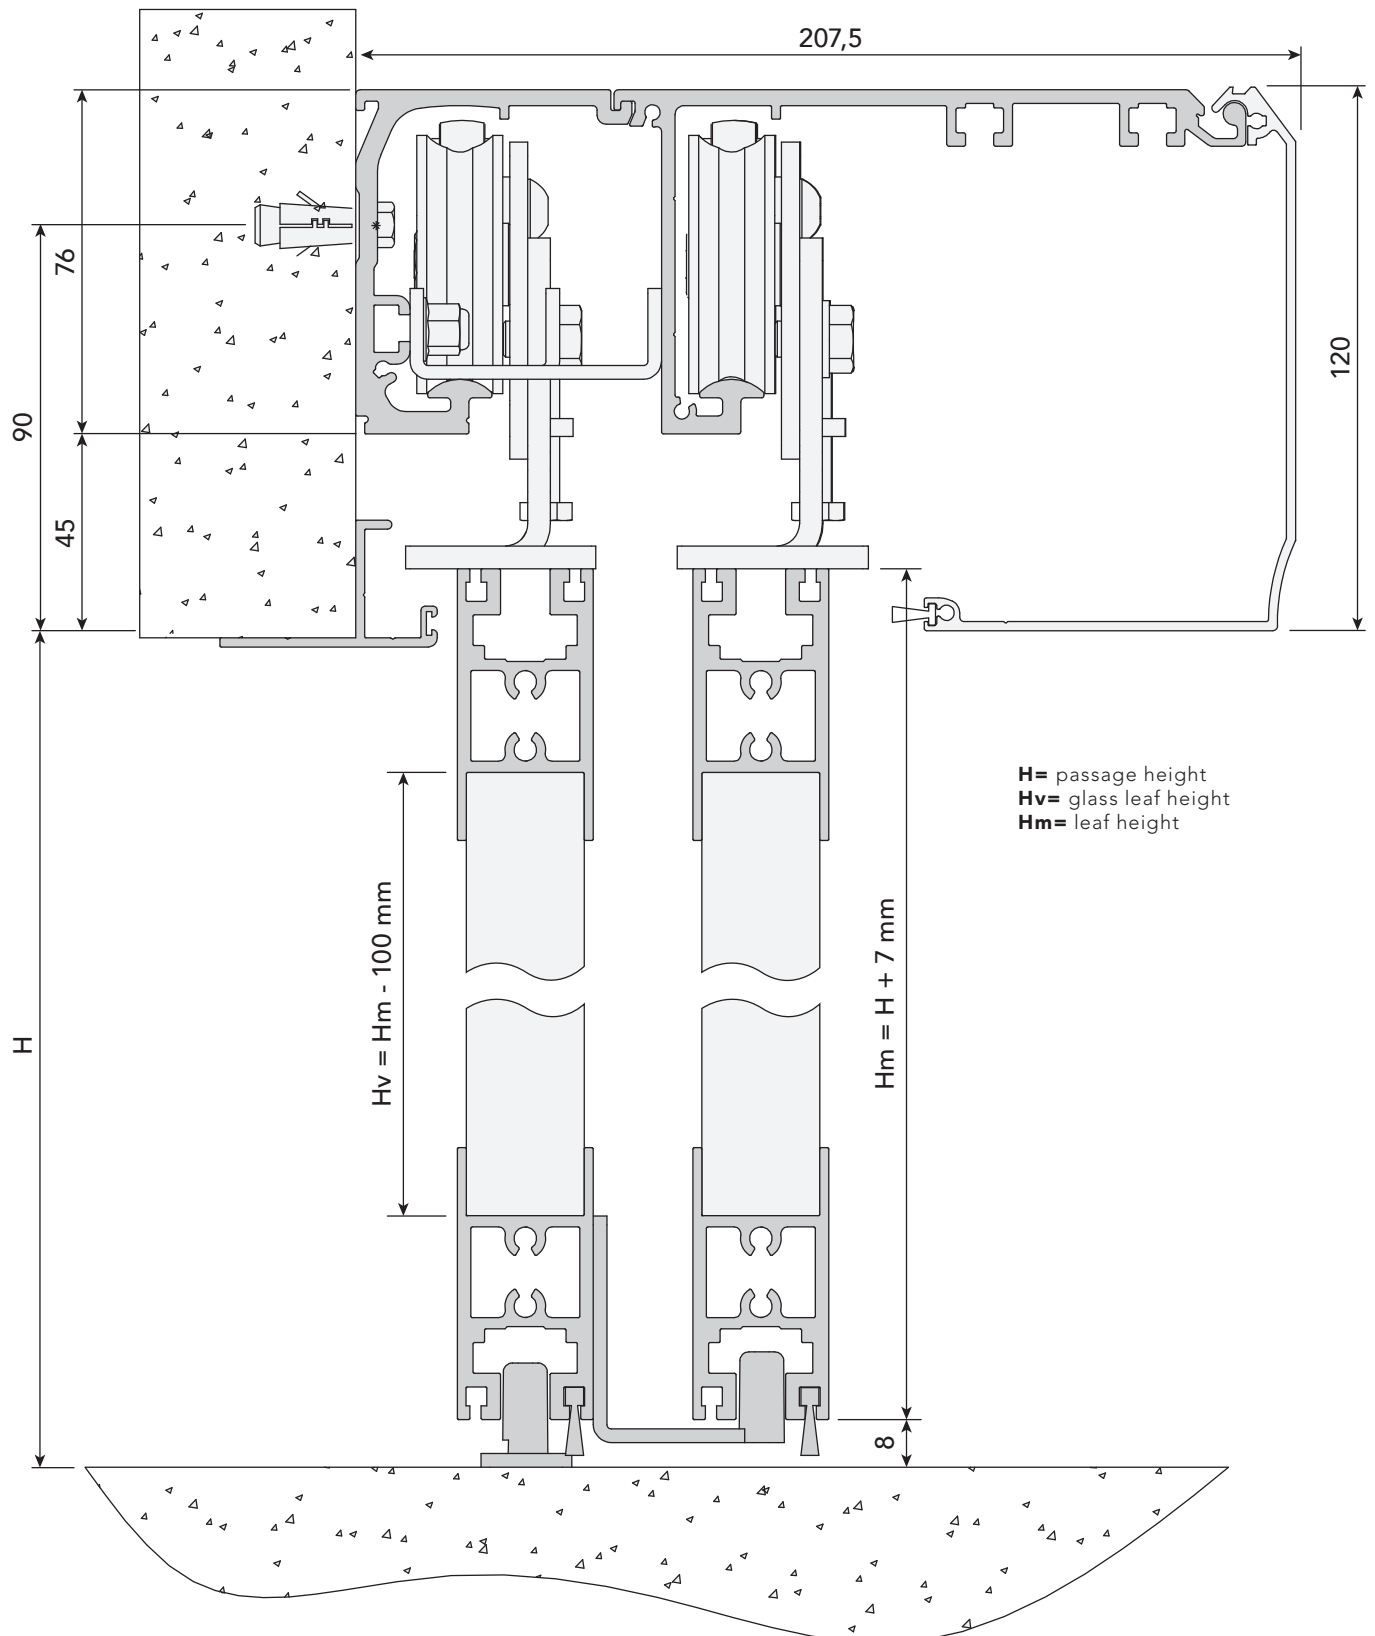




entrance with commercial profiles

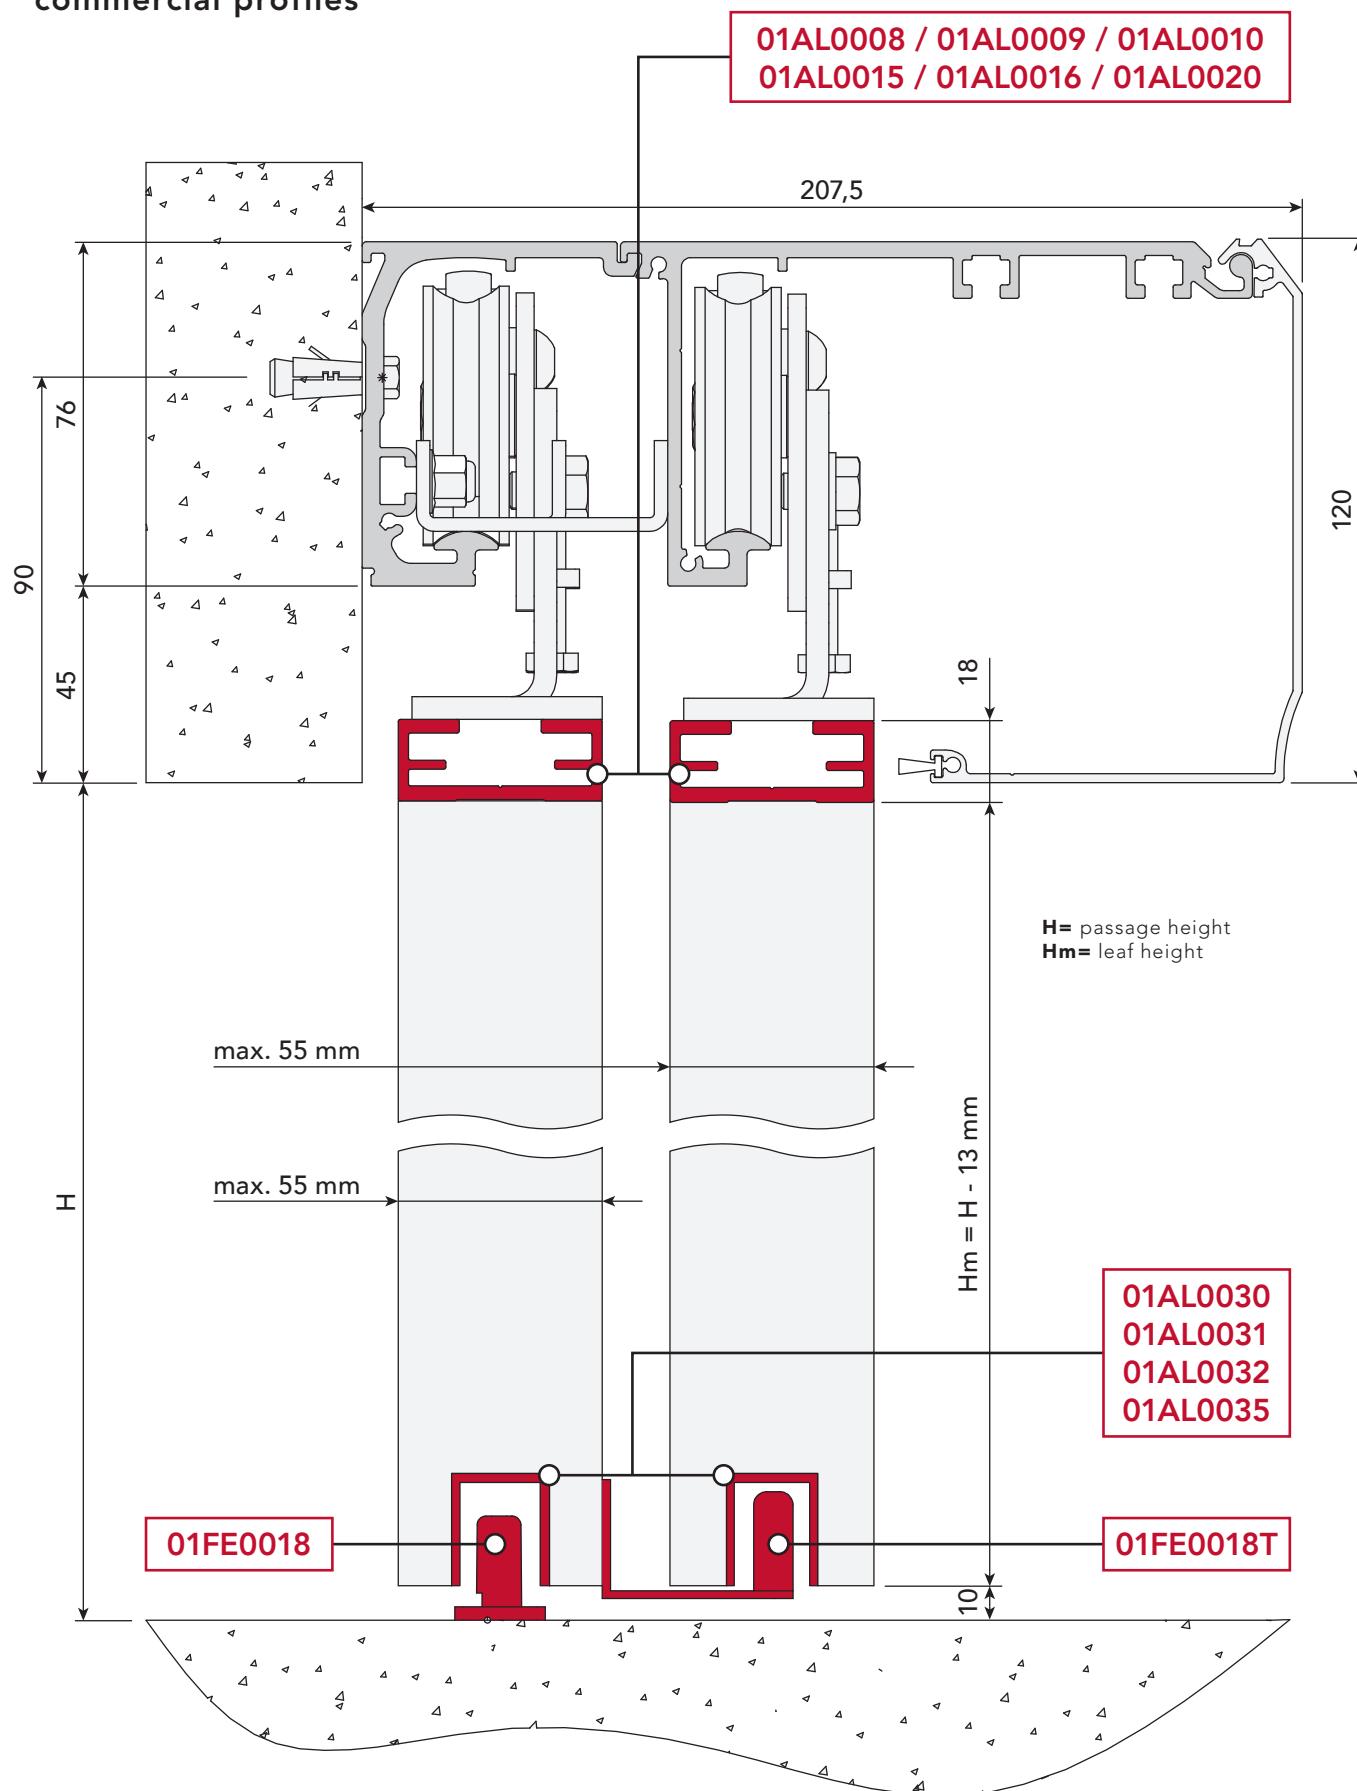





entrance with fastening set
for glass leaf with pre-drilled holes

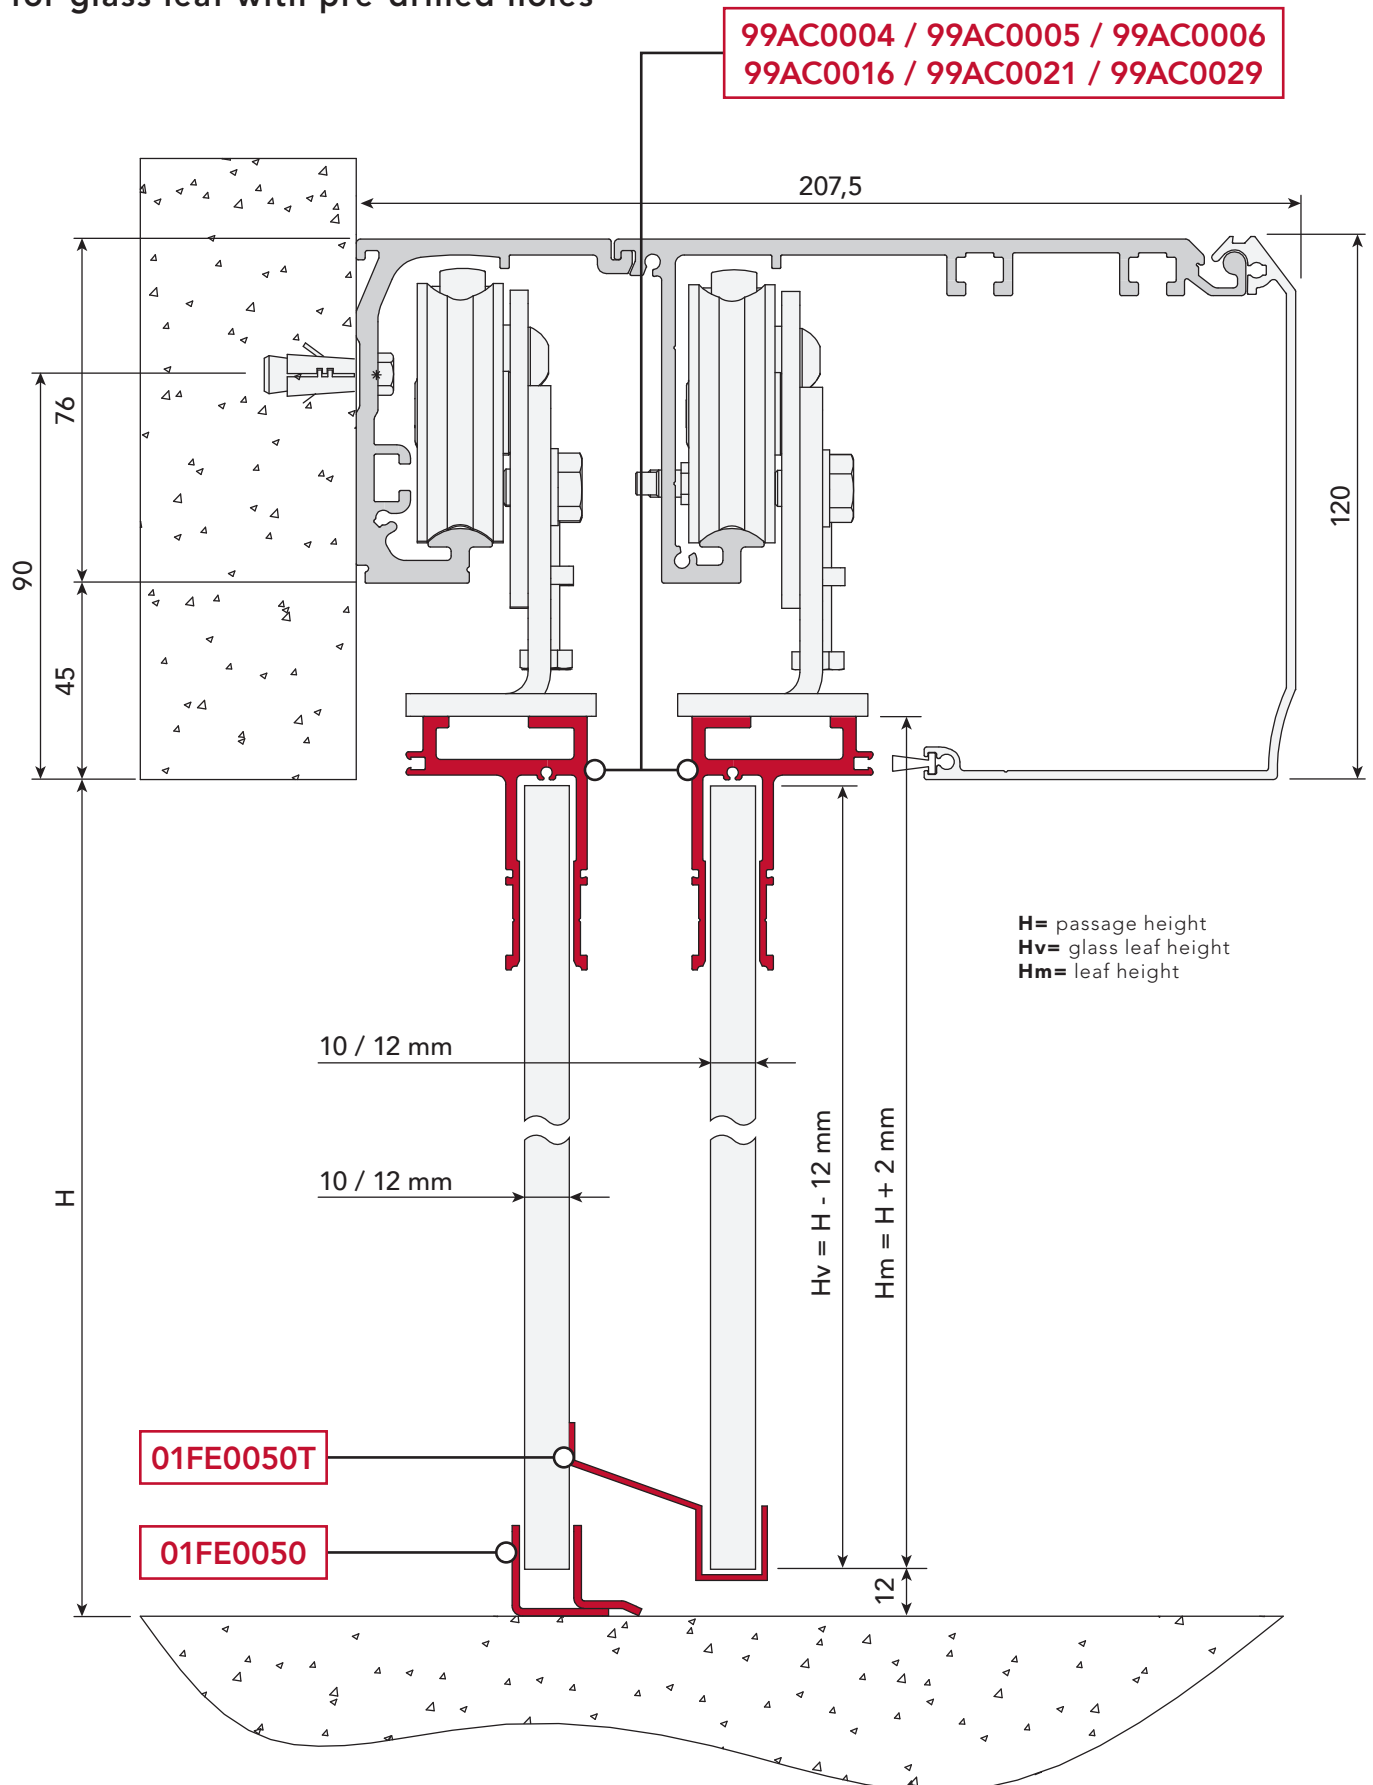




entrance with fastening set for glass leaf to clamp

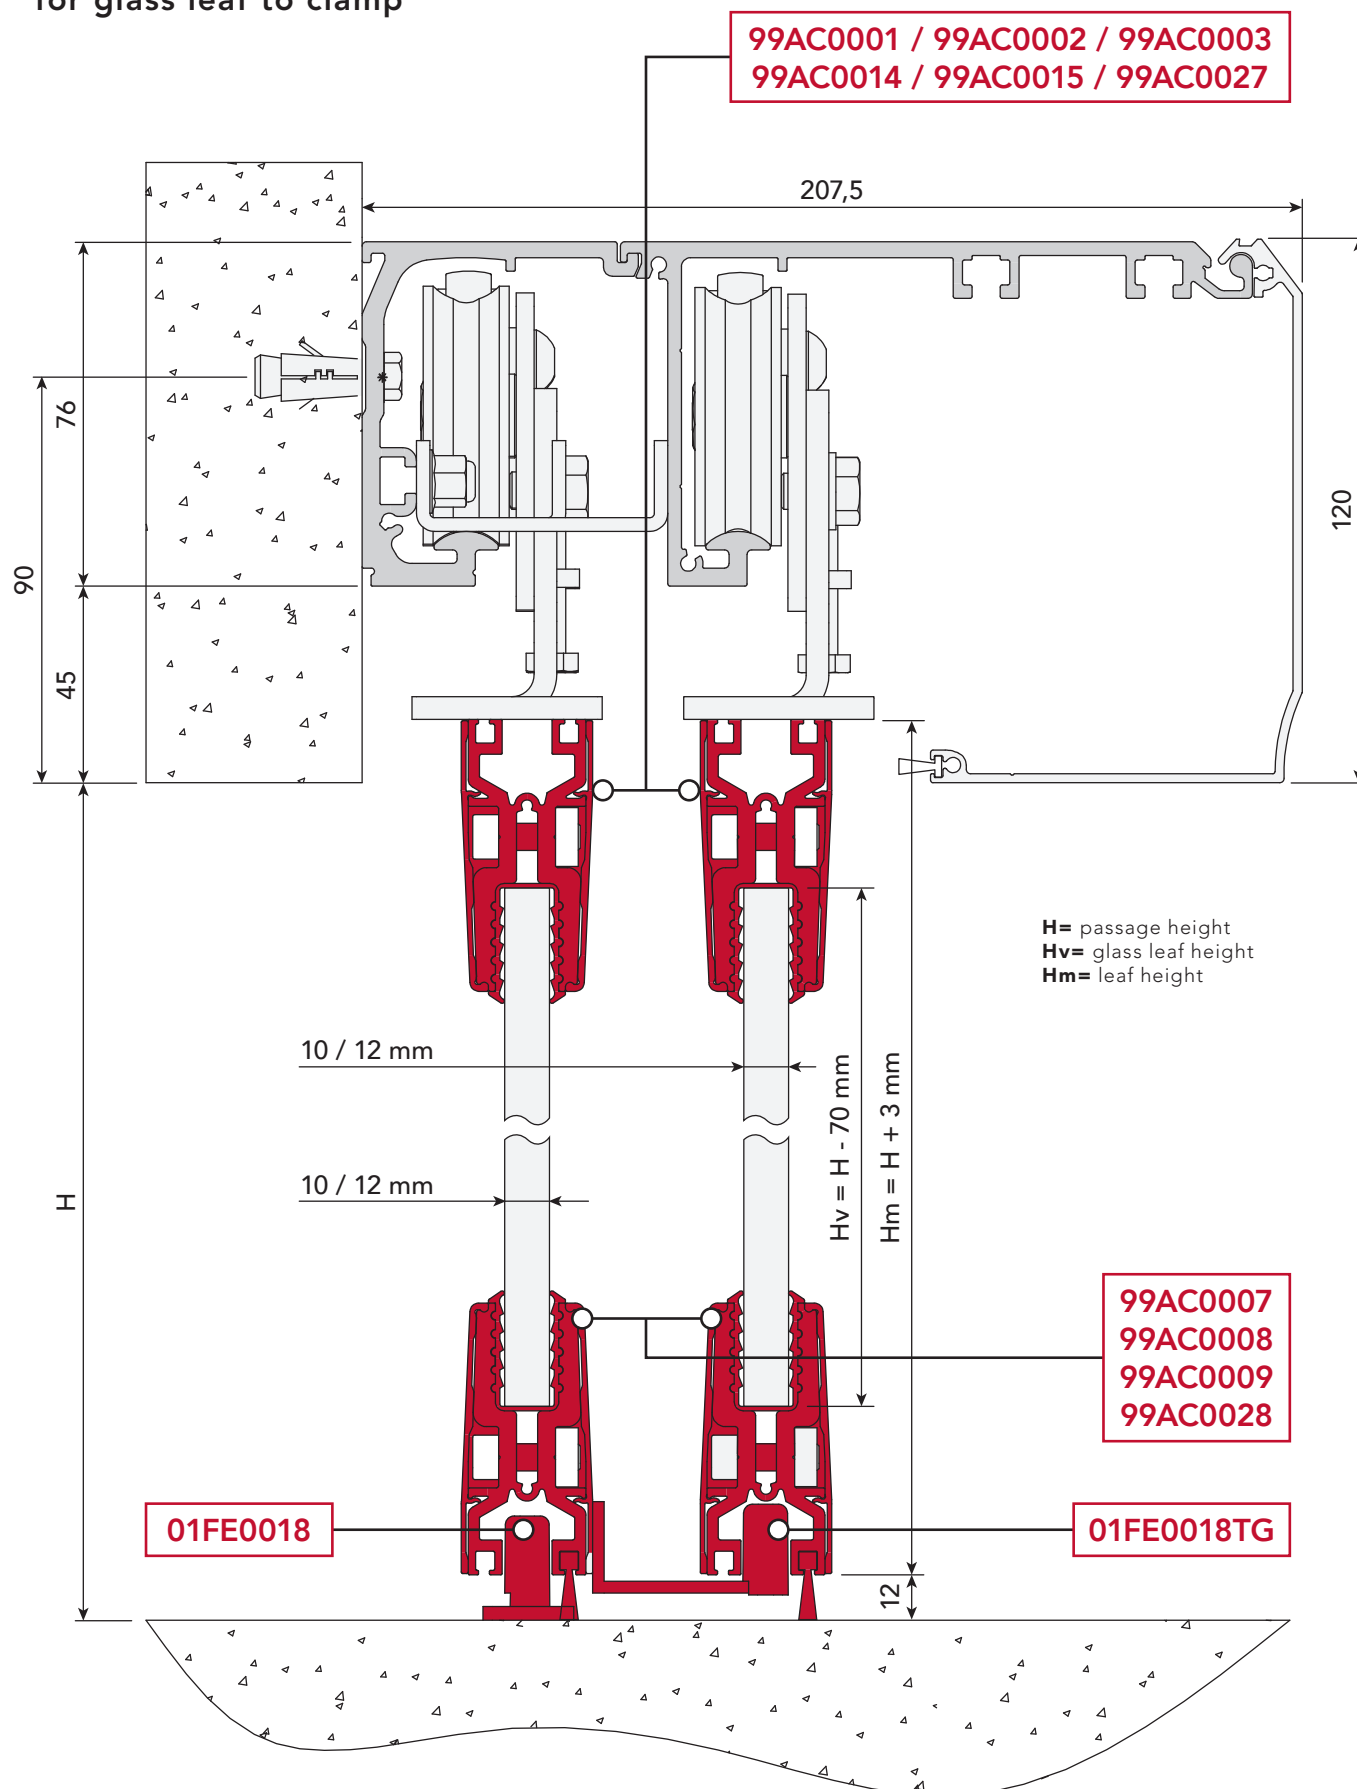

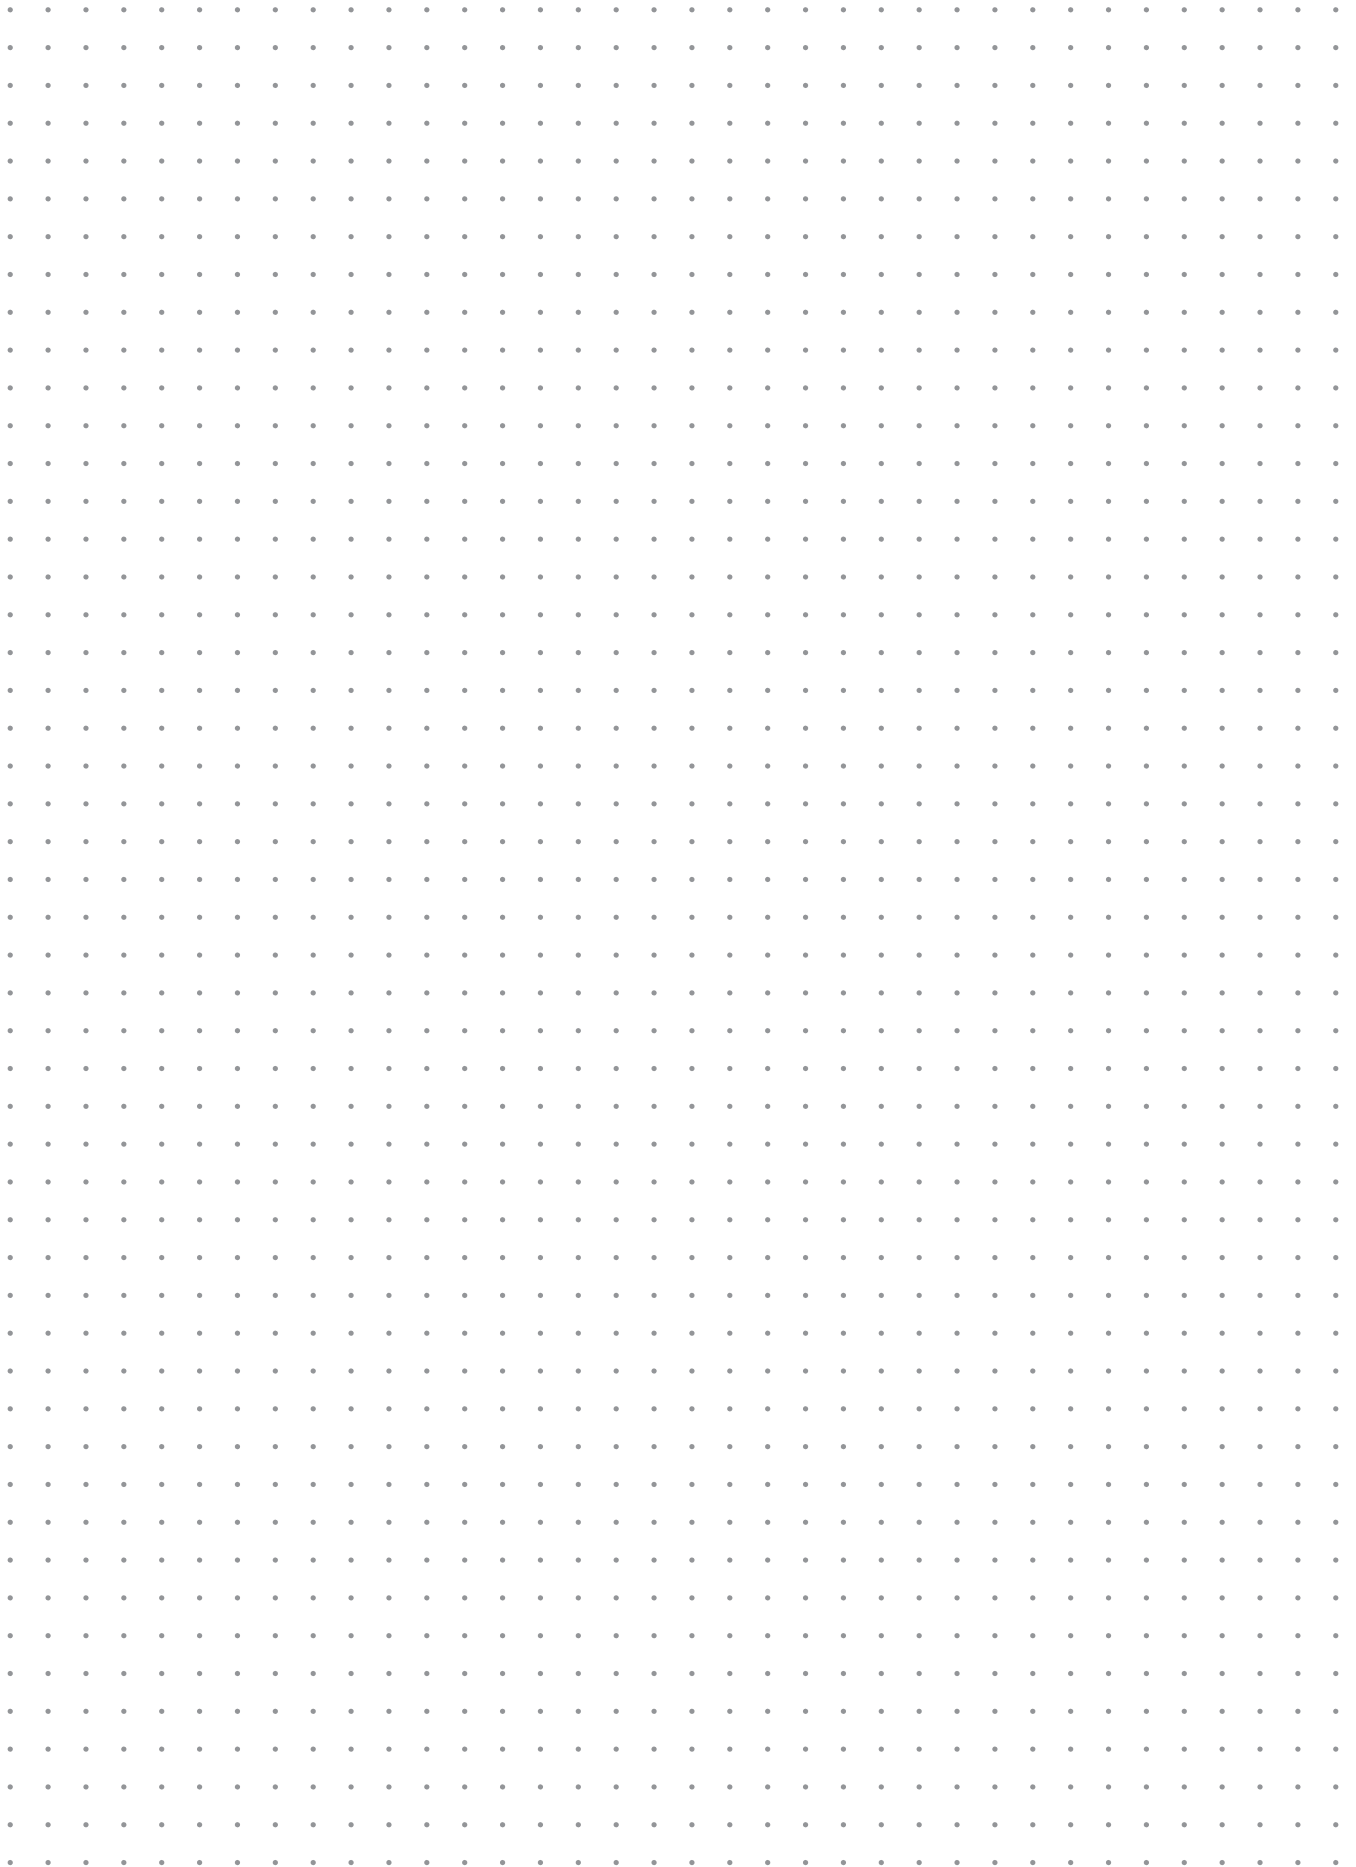

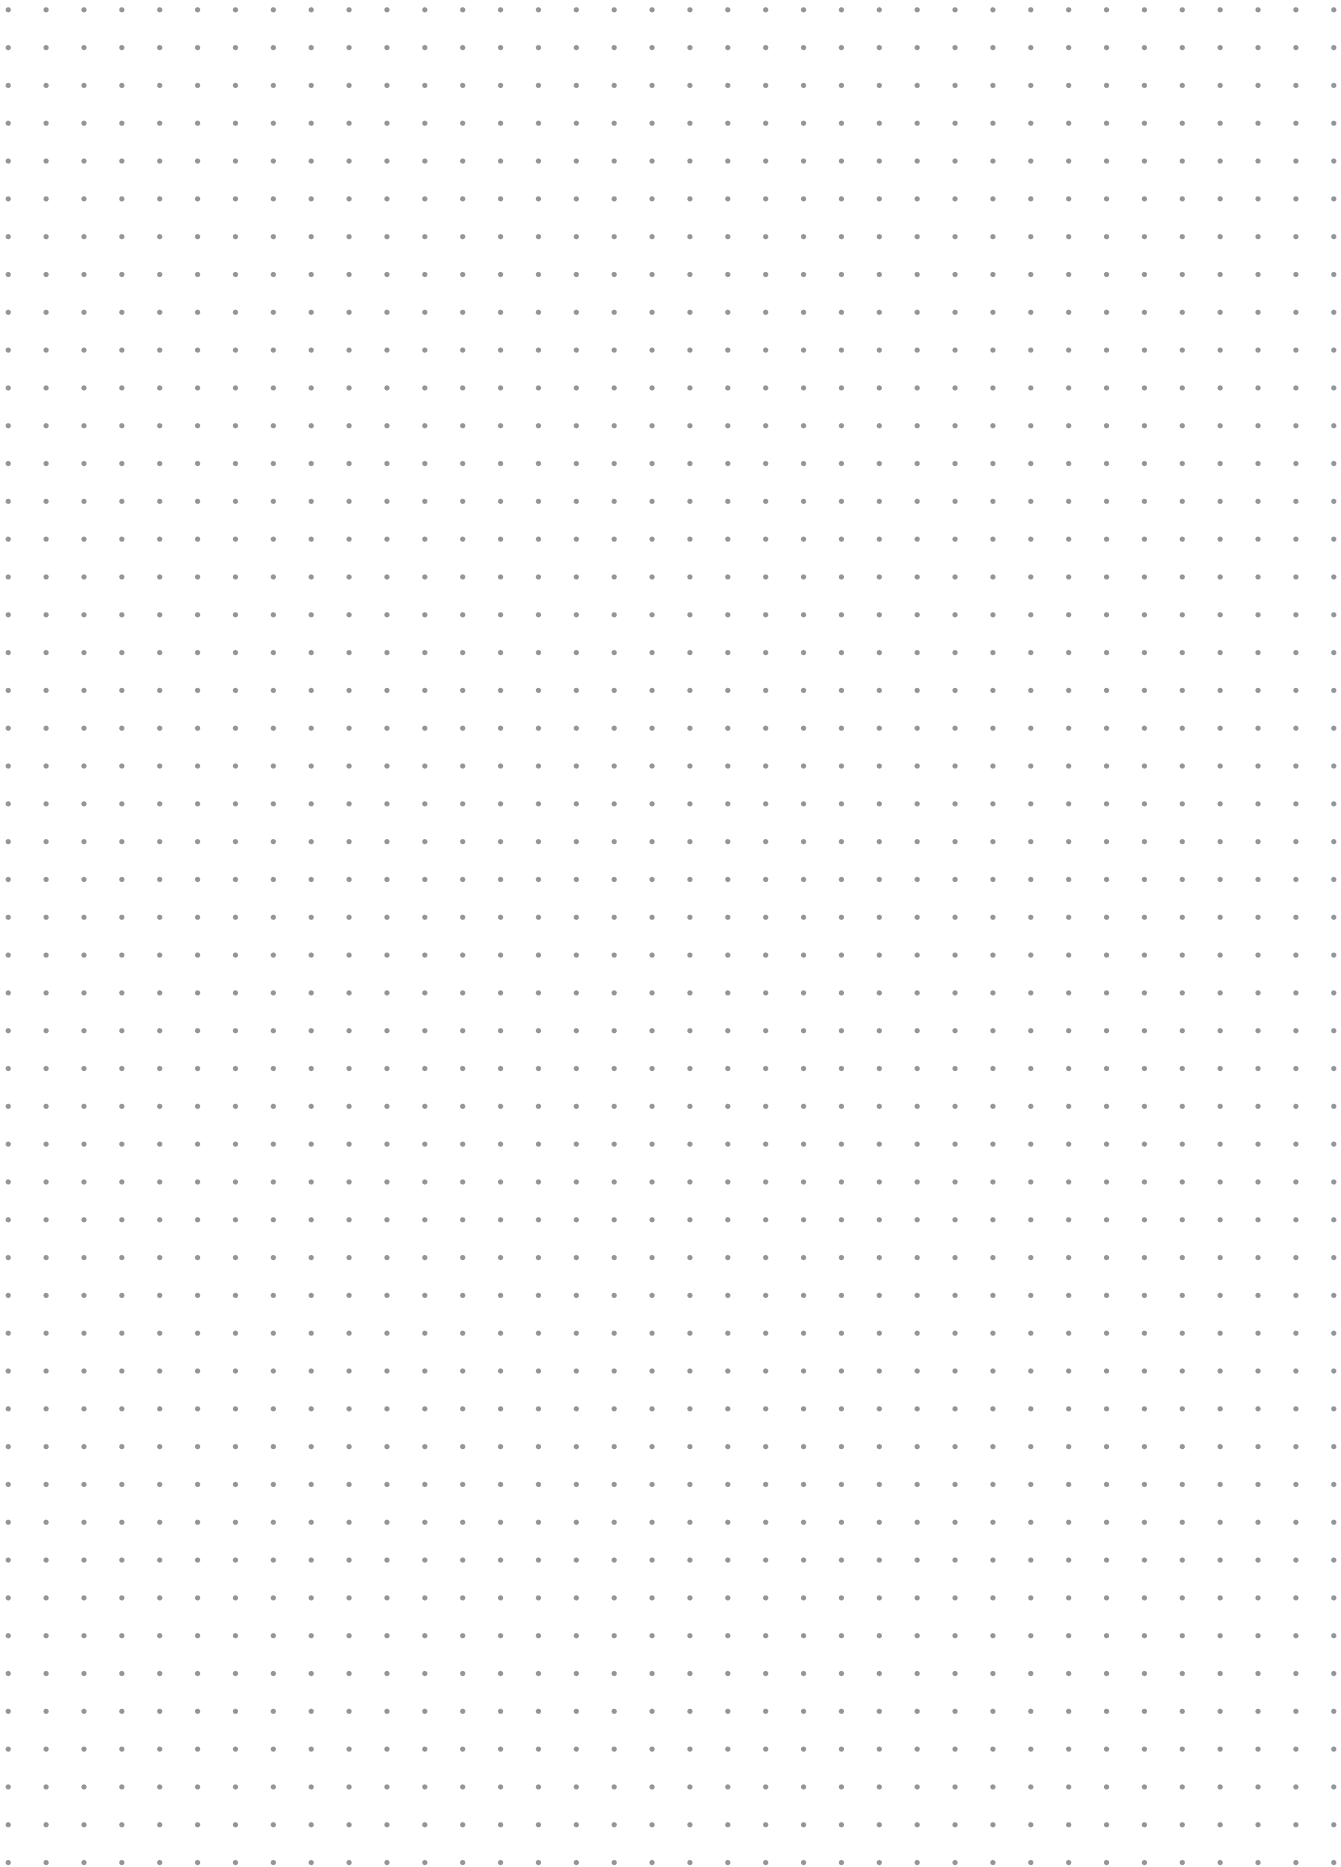



MYONE S.r.l

Via Abbate Tommaso, 52
30020 Quarto D'Altino (VE) ITALY

T +39 0422 824384

info@myoneautomation.com
www.myoneautomation.com

Part of the Benincà family

